

ULTRA-ZONE®

Forced Air Zone Controls


SUBMITTAL SHEET

Model MA-15s Actuator




The MA-15S motor actuators are easy to install, easy to wire up, and come with a 5 year warranty. The superior design insures long life and no maintenance. *The Motor can be oriented in any position in a conditioned area.* The UL Listed Motor Actuator is a 24vac 3 wire power open & power close type rated at 18 inch lbs. of torque and 15 second travel time. It includes an integrated wiring terminal block, and a NEMA1 rated housing. Dual End-Stop adjustments allow for a maximum Open and Minimum Close field position capability. A positional arrow is also included that provides visual indication of blade travel. Optional Model S1A, Auxiliary end-switch can be added if required.

Technical Data

Power Supply	24 VAC ± 20% 50/60Hz 24 VDC ± 10%
Power Consumption	1.5 W
Transformer Sizing	2.5 VA(Class 2 power source)
Electrical Connection	Screw Terminal (26 to 14 GA Wire)
Torque	18 in-lb [2 Nm]
Direction of Rotation	Reversible with ↺/↻ switch
Manual Override	External Push Button
Running Time	15 seconds, constant independent of load
Humidity	5 to 95% RH Non-Condensing
Ambient Temperature	-22°F to +122°F [-30°C to +50°C]
Storage Temperature	-40°F to +176°F [-40°C to +80°C]
Housing	NEMA 1 / IP20
Housing Material	UL94-5VA
Agency Listings	cULus
Noise Level	45dB(A)

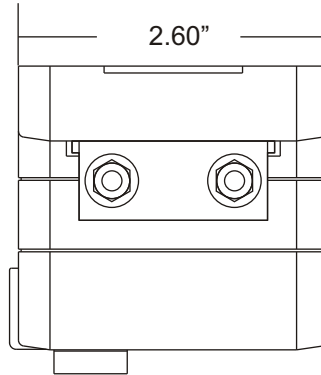

*Positional Indicator
not attached for clarity*

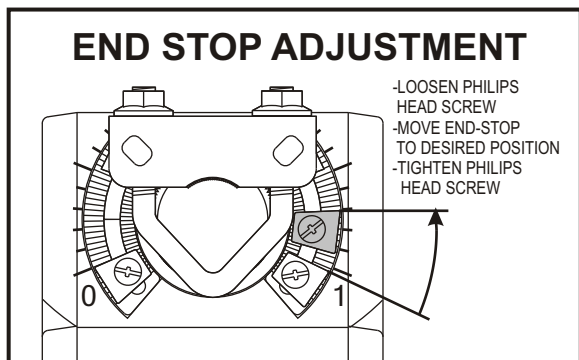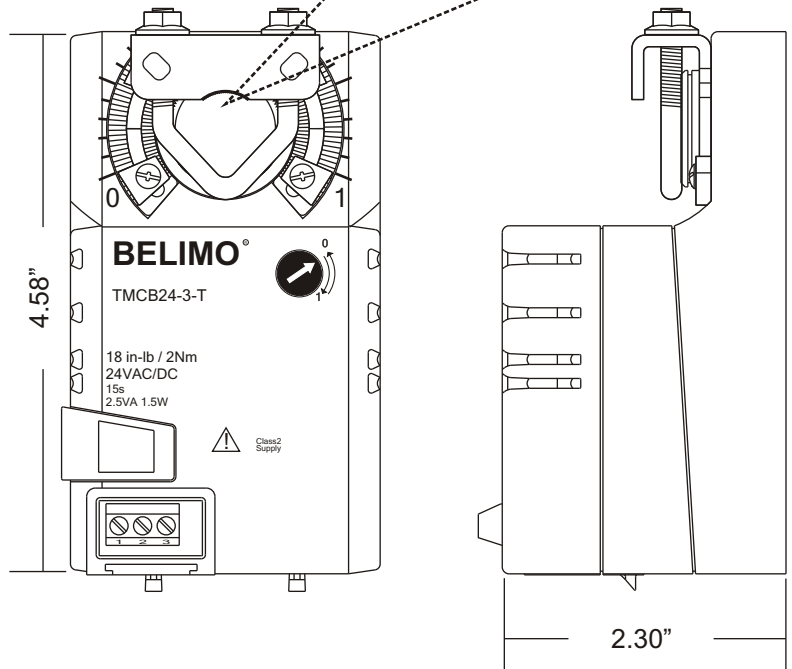

SUBMITTAL FORM

SUBMITTED BY: _____

JOB: _____

ARCHITECT: _____

ENGINEER: _____

CONTRACTOR: _____

LOCATION: _____




385 Hwy. 33
Englishtown, NJ 07726
Ph: 800-446-3110
Fx: 732-446-5362

WIRING SOLUTIONS


Motor Actuator Terminals

TERMINAL	Direction Switch	
	0 ↶	↷ 1
1	24v Com.	24v Com.
2	Counter Clockwise	Clockwise
3	Clockwise	Counter Clockwise



Wiring to a Zone Control Panel

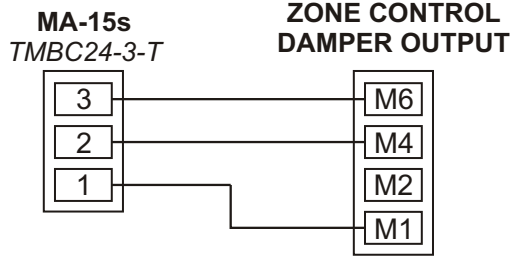

Wiring a Thermostat to Control a Single Damper

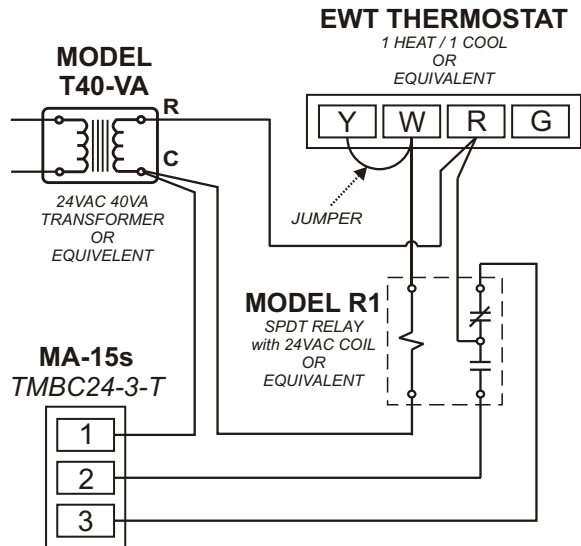

Wiring in Parallel

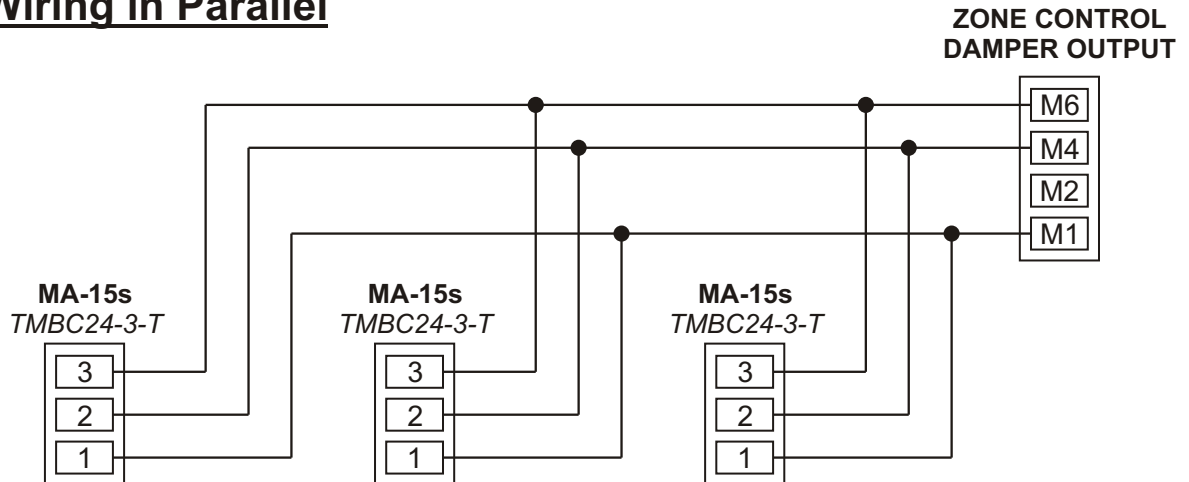

DIRECTION OF ROTATION

Clockwise = Close
Counter-Clockwise = Open

*For reverse operation Change switch position