


ULTRA-ZONE™

Forced Air Zone Controls

SUBMITTAL SHEET

Model URD-ESR

Model URD-ESR is a round single blade damper constructed from heavy (24) gauge galvanized steel. The 24 volt motor actuator is direct coupled to the drive shaft and set in bronze bearings. It is a power closed/spring open (standard). The damper can be field reversed to a power open/spring closed model. The URD-ESR damper may be used with either flexible or rigid ductwork. When the URD-ESR is closed it seals against a foam gasket for a tight seal. LED indicates power to the motor only.

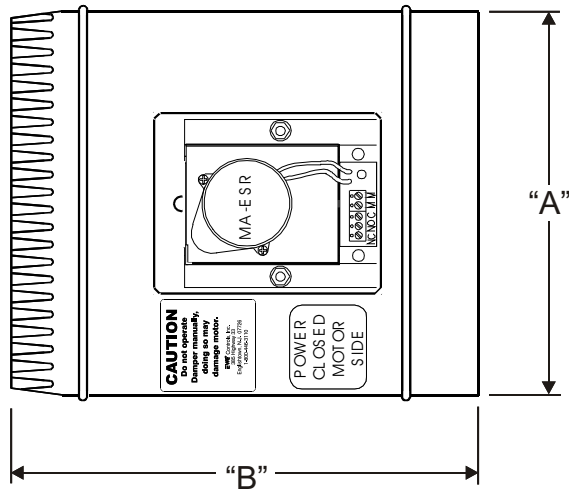

DIMENSIONS		
MODEL #	A	B
URD-ESR 4	4.0"	7.75"
URD-ESR 5	5.0"	7.75"
URD-ESR 6	6.0"	7.75"
URD-ESR 7	7.0"	9.75"
URD-ESR 8	8.0"	9.75"
URD-ESR 9	9.0"	11.75"
URD-ESR 10	10.0"	11.75"
URD-ESR 12	12.0"	13.62"
URD-ESR 14	14.0"	15.62"
URD-ESR 16	16.0"	19.98"
URD-ESR 18	18.0"	19.98"
URD-ESR 20	20.0"	19.98"

