

ULTRA-ZONE[®]

Forced Air Zone Controls

SUBMITTAL SHEET

Model HK2000
Zone Control Panel

SPECIFICATIONS

INPUT VOLTAGE:

PANEL: 19-30VAC 60 Hz, Supplied via HVAC Equipment Transformer.
DAMPERS: 19-30VAC 60 Hz, 40-60VA Max. NEC Class 2.

CURRENT DRAW: Max 8VA @ 24VAC.

OVER-CURRENT PROTECTION:

PANEL: 2.5 amp or 60 VA.
DAMPERS: 2.5 amp or 60 VA.

WIRING: 18 gauge Solid copper wire. Do not use Stranded or Shielded Cable.

TEMPERATURE: -20° to 160°F (-29° to 71°C).

HUMIDITY: 0% - 95% RH Non-Condensing.

FEATURES

The HK2000 is a Fresh Air and Economizer Panel.

COMPATIBLE EQUIPMENT:

Gas/Electric/Hydro – Up to 1 Stage Heating and 1 Stage Cooling.

COMPATIBLE THERMOSTATS:

Any single stage Heat/Cool Thermostat.

COMPATIBLE DAMPERS:

EWC Models URD, ND, RSD and SID. Any 24vac 3 Wire or 2 Wire damper.

ACCESSORIES:

Model OAS – Outside air sensor. *(Included)*

Model RAS – Return air sensor.


Model EC – Enthalpy Control

ADDITIONAL FEATURES:

*Adjustable Time Based Fresh Air Cycling, to purge the home of stale air and odors.

*On Board LED's indicate system operation.

DIMENSIONS:

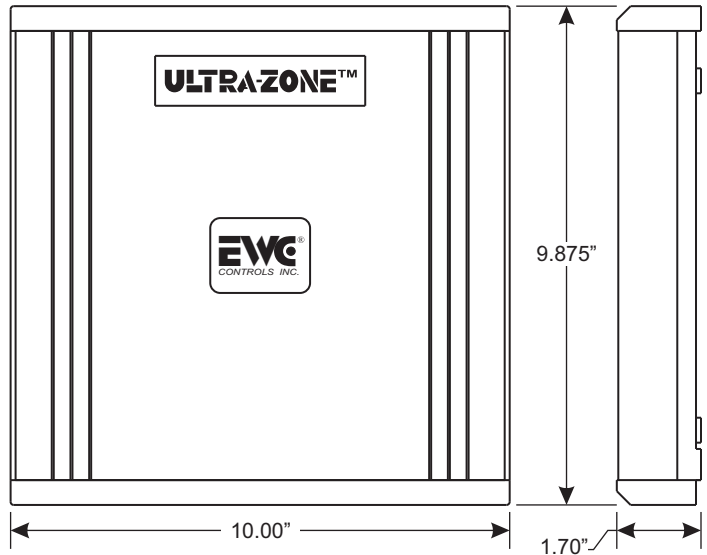

Excellence Without Compromise

EWC[®]
CONTROLS INC.

385 Hwy. 33
Englishtown, NJ 07726
Ph: 800-446-3110
Fx: 732-446-5362

P/N 090377A0146 REV. A

Copyright © EWC Controls 2006-2008 All Rights Reserved

SUBMITTAL FORM

SUBMITTED BY: _____

JOB: _____

ARCHITECT: _____

ENGINEER: _____

CONTRACTOR: _____

LOCATION: _____